


Worcester F911 High Performance Top Entry Ball Valves



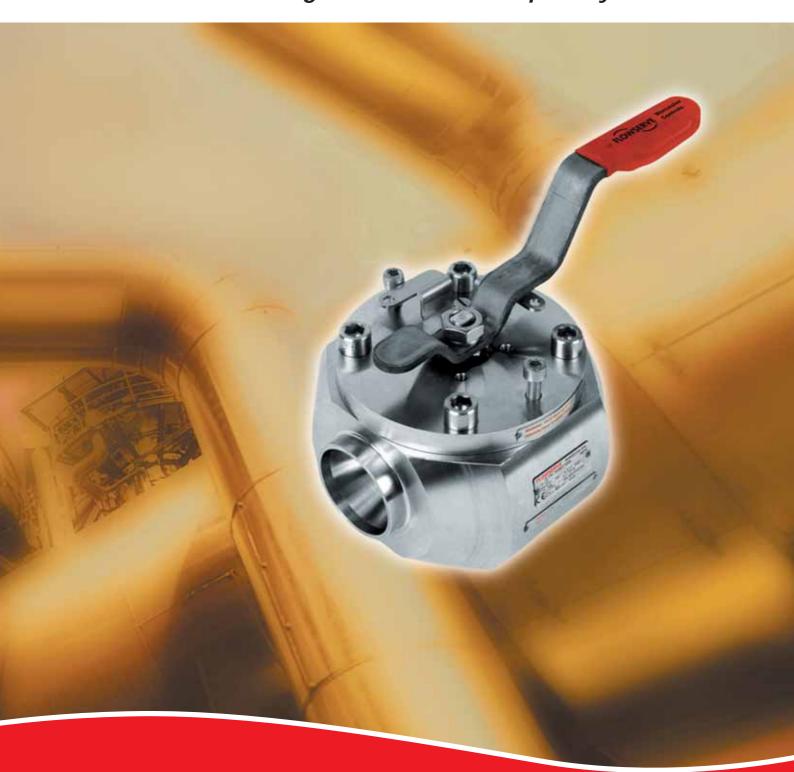

The Flowserve Worcester Series F911 range of top-entry valves has been designed to fulfil the market requirement for a weld-in-line valve that can be fully and easily maintained.

This has been achieved by utilising Worcester's renowned ball and seat design technology to provide a unique valve sealing arrangement, allowing bubble tight shut-off when closed and simple removal of the internals when open. The valve's low operating torque means that a smaller actuator can be used which in turn provides a compact package size.

The top-entry concept allows for in-line maintenance with the

additional benefit that all components other than the body are removed in one assembly using Worcester's unique design. Initially designed for use in the nuclear industry, the F911 is suitable for a wide range of applications where pipeline integrity and ease of maintenance are paramount.

Designed to BS5351, and to meet the fire testing requirements of ISO 10497, the valve can be manufactured from virtually any wrought material to meet the most demanding applications. Available in sizes 15-50 mm with butt weld end connections. Pressure rating 50 bar.

Features	Benefits
One-piece body	Pipeline integrity
Cartridge assembly	Ease of maintenance
Top-entry concept	 In-line maintenance
 ISO mounting pattern 	Ease of actuation
BS5351 design	Certified quality
Unique ball/seat package	Low operating torques





FCD WCEBR0017-01 Printed in Germany. (Replaces PB15 Rev 01/03)

Due to continuous development of our product range, we reserve the right to alter the dimensions and information contained in this leaflet as required. Information given in this leaflet is made in good faith and based upon specific testing but does not, however, constitute a guarantee.



Flowserve Flow Control (UK) Ltd.

Worcester Controls Burrell Road, Haywards Heath West Sussex RH16 1TL United Kingdom

Telephone: +44 (0)1444 314400 Telefax: +44 (0)1444 314401 Email: wvukinfo@flowserve.com